SIEMENS

Data sheet



circuit breaker 3VM1 IEC frame 160 breaking capacity class N Icu=25kA @ 415V 4-pole, line protection TM220, ATFM, In=160A overload protection Ir=112A...160A short-circuit protection Ii=10 x In N conductor protection 100% nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	TM220
protection function of the overcurrent release	LI
number of poles	4
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / at 50/60 Hz / rated value	500 V
operating voltage / at DC / rated value	500 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	38 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	12.67 W
mechanical service life (operating cycles) / typical	15 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	6 000
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
 communication function 	No
other measurement function	No
Net Weight	1.287 kg
Current	
operational current	
• at 40 °C	160 A
• at 45 °C	160 A
• at 50 °C	160 A
• at 55 °C	158 A
• at 60 °C	155 A
• at 65 °C	153 A
• at 70 °C	150 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	N
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	36 kA
• at 415 V	25 kA
• at 440 V	16 kA
● at 500 V	7 kA
operating short-circuit current breaking capacity (lcs)	

• at 240 V	27 kA
● at 415 V	18 kA
● at 440 V	12 kA
● at 500 V	5 kA
short-circuit current making capacity (Icm)	
● at 240 V	76 kA
● at 415 V	53 kA
● at 440 V	32 kA
● at 500 V	12 kA
design of short-circuit protection	For switching capacity values in DC power systems, see the 3VA Molded Case
	Circuit Breaker Manual; link available under Service & Support in the last chapter
Adjustable parameters	Chapter
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with	INO
12t characteristic	
• minimum	112 A
• maximum	160 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
• minimum	1 s
• maximum	1s
adjustable response value setting current (li) / for I-tripping	
• minimum	1 600 A
• maximum	1 600 A
adjustable setting current (InN) / for N-tripping	
• minimum	160 A
• maximum	160 A
adjustable current response value current / of instantaneous short-circuit trip unit	
maximum	1 600 A
design of the N-conductor protection	100%
product function / grounding protection	No
Mechanical Design	110
product component	
undervoltage release	No
	INU
· ·	No
voltage trigger	No No
voltage triggertrip indicator	No
voltage trigger trip indicator height [in]	No 5.12 in
voltage triggertrip indicatorheight [in]height	No 5.12 in 130 mm
 voltage trigger trip indicator height [in] height width [in] 	No 5.12 in 130 mm 4 in
 voltage trigger trip indicator height [in] height [in] width [in] 	No 5.12 in 130 mm 4 in 101.6 mm
voltage trigger trip indicator height [in] height width [in] width depth [in]	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in
voltage trigger trip indicator height [in] height width [in] width depth [in] depth	No 5.12 in 130 mm 4 in 101.6 mm
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin 0
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin O No
voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front connection nut keeper kit on both ends 12 x 1 mm 17 x 6.5 mm Silver Tin O No

- during operation / maximum
- during storage / minimum
- during storage / maximum

70 °C -40 °C 80 °C

Approvals / Certificates

General Product Approval

Confirmation









Miscellaneous

General Product Approval

Test Certificates

Marine / Shipping



Miscellaneous









Marine / Shipping

other

Environment



Confirmation

Miscellaneous

Environmental Confirmations Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

 $\underline{https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VM1116-3GE42-0AA0}$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VM1116-3GE42-0AA0

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VM1116-3GE42-0AAC


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications

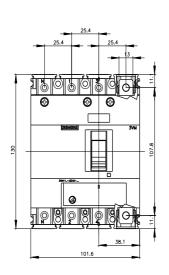

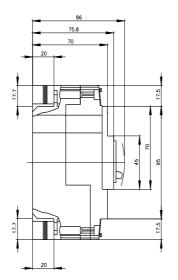

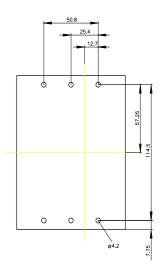



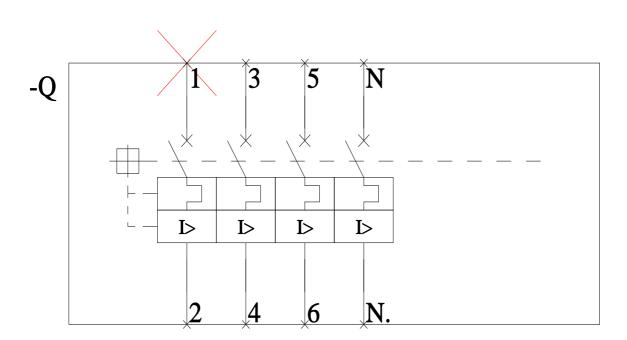

last modified: 3/11/2024 🖸

