SIEMENS

Data sheet



circuit breaker 3VA1 IEC Frame 100 breaking capacity class N Icu=25 kA @ 415 V 4-pole, line protection TM210, FTFM, ln=80 A overload protection lr=80 A permanently set short-circuit protection li=10 x In N conductor unprotected nut keeper kit

product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	TM210
protection function of the overcurrent release	LI
number of poles	4
eneral technical data	
insulation voltage / rated value	800 V
operating voltage / at DC / rated value	600 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	19.2 W
mechanical service life (operating cycles) / typical	20 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	9 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	6 300
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
• communication function	No
 other measurement function 	No
Net Weight	1.184 kg
urrent	
operational current	
• at 40 °C	80 A
• at 45 °C	80 A
• at 50 °C	80 A
• at 55 °C	78 A
• at 60 °C	77 A
• at 65 °C	75 A
• at 70 °C	74 A
witching capacity according to IEC 60947	
switching capacity class of the circuit breaker	N
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	36 kA
• at 415 V	25 kA
• at 440 V	16 kA
● at 500 V	5 kA
● at 690 V	5 kA

• at 240 V	36 kA
• at 415 V	25 kA
• at 440 V	16 kA
● at 500 V	5 kA
• at 690 V	5 kA
short-circuit current making capacity (Icm)	
● at 240 V	75.6 kA
● at 415 V	52.5 kA
● at 440 V	32 kA
• at 500 V	7.5 kA
• at 690 V	7.5 kA
design of short-circuit protection	For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with	
12t characteristic	20.4
• minimum	80 A 80 A
maximum adjustable response value delay time (tr) / for L-tripping / with l2t	00 A
characteristic	
• minimum	1 s
• maximum	1s
adjustable response value setting current (li) / for I-tripping	
• minimum	800 A
• maximum	800 A
adjustable setting current (InN) / for N-tripping	
• minimum	0 A
• maximum	0 A
design of the N-conductor protection	without
product function / grounding protection	No
Mochanical Dosign	
Mechanical Design	
product component	
	No
product component	No No
product component • undervoltage release	No No
product component	No
product component	No No 5.12 in 130 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in]	No No 5.12 in 130 mm 4 in
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in]	No No 5.12 in 130 mm 4 in 101.6 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in]	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth	No No 5.12 in 130 mm 4 in 101.6 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit	No No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit	No No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	No No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit	No No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts	No No S.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
product component • undervoltage release • voltage trigger • trip indicator height [in] height width [in] width depth [connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front	No No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin
product component undervoltage release voltage trigger trip indicator height [in] height width [in] width depth [in] depth Connections arrangement of electrical connectors / for main current circuit type of electrical connection / for main current circuit type of connectable conductor cross-sections / for flat-bar terminal connection / minimum type of connectable conductor cross-sections / for flat-bar terminal connection / maximum design of the surface / of the connections / on the top of the switch (N, 1, 3, 5) design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) Auxiliary circuit number of CO contacts / for auxiliary contacts Accessories product extension / optional / motor drive Environmental conditions protection class IP / on the front ambient temperature	No 5.12 in 130 mm 4 in 101.6 mm 2.76 in 70 mm Front terminal nut keeper kit on both ends 12 x 1 mm 17 x 6,5 mm Silver Tin No

during storage / minimum	-40 °C
 during storage / maximum 	80 °C
Environmental footprint	
Environmental Product Declaration(EPD)	Yes
Global Warming Potential [CO2 eq] / total	190 kg
Global Warming Potential [CO2 eq] / during manufacturing	4.67 kg
Global Warming Potential [CO2 eq] / during operation	186 kg
Global Warming Potential [CO2 eq] / after end of life	-0.826 kg
reference code / according to IEC 81346-2	Q
Approvals / Certificates	

General Product Approval

Confirmation









<u>Miscellaneous</u>

General Product Approval

EMV

Test Certificates

Marine / Shipping





Special Test Certificate

Type Test Certificates/Test Report

Miscellaneous



Marine / Shipping









CCS (China Classification Society) **Miscellaneous**

other

other

Environment

Confirmation

Miscellaneous





Environmental Confirmations Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1080-3ED42-0AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3VA1080-3ED42-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1080-3ED42-0AA0


CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

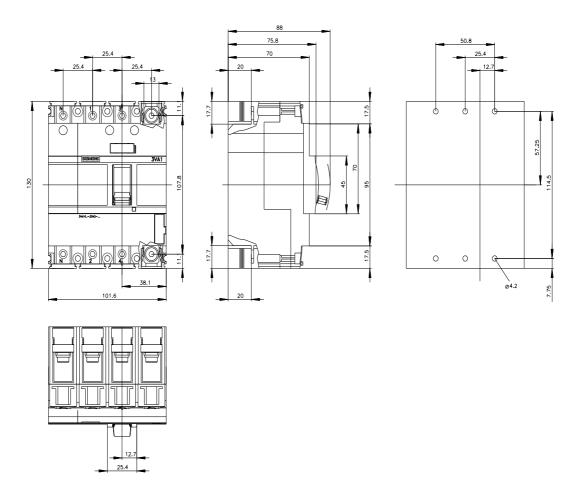

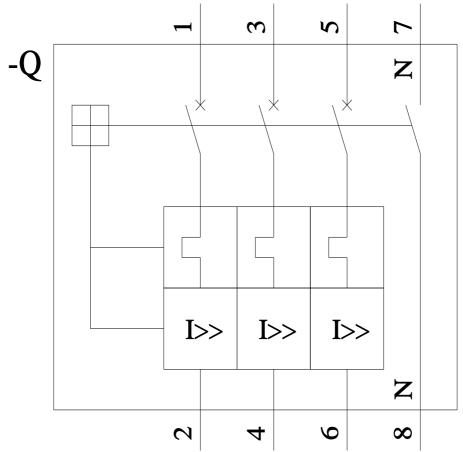

last modified: 3/11/2024 🖸

