



circuit breaker 3VJ1 IEC framesize 3VJ14 630A line protection FTFM 3-pole
 $I_{cu}=55kA@415V$ $I_{cs}=75\%$ I_{cu} $I_n=630A$ overload protection $I_r=630A$ short-circuit
 protection $I_i=10 \times I_n$ Screw connection


| Model | |
|---|-----------------------------|
| product designation | Molded Case Circuit Breaker |
| design of the product | Line protection |
| design of the overcurrent release | FTFM |
| protection function of the overcurrent release | LI |
| number of poles | 3 |
| General technical data | |
| insulation voltage / rated value | 1 000 V |
| operating voltage / at AC / rated value | 415 V |
| power loss [W] / maximum | 31.5 W |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole | 10.5 W |
| mechanical service life (operating cycles) / typical | 10 000 |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V | 4 500 |
| ground-fault monitoring version | without |
| Net Weight | 5.46 kg |
| Current | |
| operational current | |
| • at 40 °C | 630 A |
| • at 45 °C | 630 A |
| • at 50 °C | 630 A |
| • at 55 °C | 613.62 A |
| • at 60 °C | 598.5 A |
| Switching capacity according to IEC 60947 | |
| maximum short-circuit current breaking capacity (I_{cu}) | |
| • at 415 V | 55 kA |
| operating short-circuit current breaking capacity (I_{cs}) | |
| • at 415 V | 41.25 kA |
| short-circuit current making capacity (I_{cm}) | |
| • at 415 V | 121 kA |
| Adjustable parameters | |
| adjustable current response value current / of the current-dependent overload release | 630 ... 630 A |
| adjustable current response value current / of instantaneous short-circuit trip unit | |
| • minimum | 6 300 A |
| • maximum | 6 300 A |
| product function / grounding protection | No |
| Mechanical Design | |
| height | 180 mm |
| width | 150 mm |

| | |
|---|-----------------------------------|
| depth | 110 mm |
| Connections | |
| arrangement of electrical connectors / for main current circuit | Front connection |
| type of electrical connection / for main current circuit | Lug connection line and load side |
| Accessories | |
| product extension / optional / motor drive | No |
| Environmental conditions | |
| protection class IP / on the front | IP42 |
| ambient temperature | |
| • during operation / minimum | -10 °C |
| • during operation / maximum | 60 °C |
| • during storage / minimum | -15 °C |
| • during storage / maximum | 75 °C |
| Approvals / Certificates | |
| other | |

[Confirmation](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VJ1463-7DA32-0AA0>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VJ1463-7DA32-0AA0>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VJ1463-7DA32-0AA0
CAx-Online-Generator
<http://www.siemens.com/cax>
Tender specifications
<http://www.siemens.com/specifications>

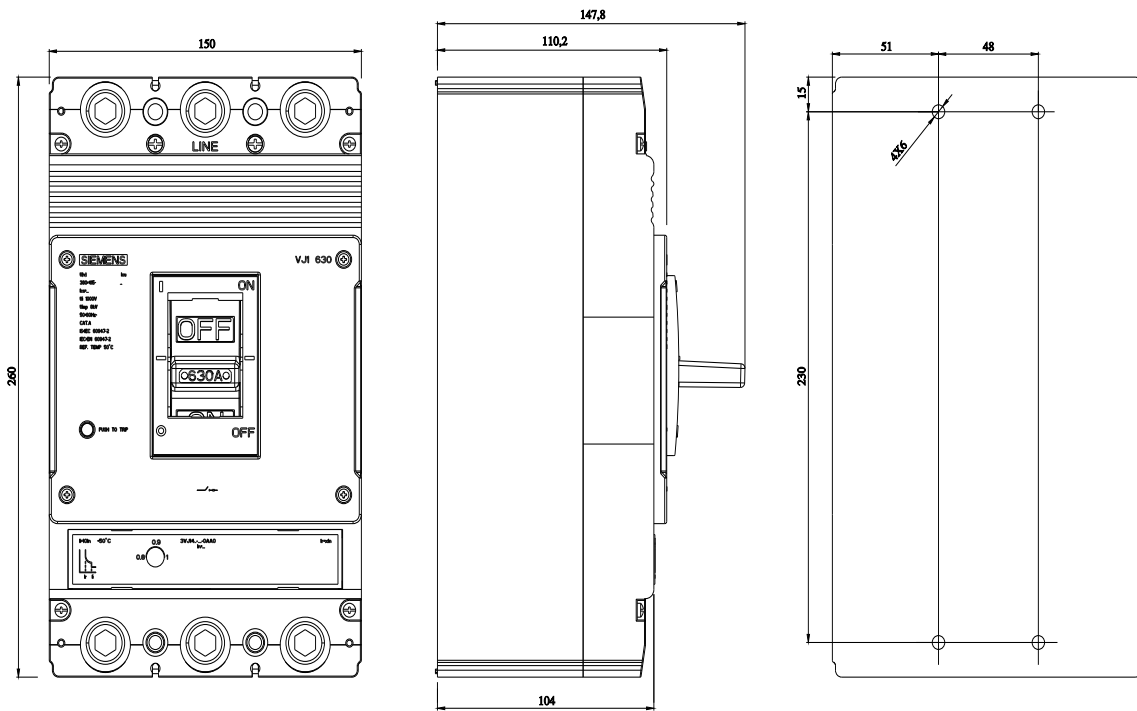

last modified:

8/16/2023 

